

Simple Ceiling 2.0

EN The pendant luminaire Simple Ceiling 2.0 represents an exquisite and effective union of environmentally conscious room acoustics with aesthetic design. The linear light source of this direct and indirect luminaire is suspended between twelve U-shaped ecoPET panels, leaving a layer of air between the components to help with sound absorption. The fixture has a noise reduction coefficient of one and utilizes a microstructure diffuser to eliminate glare.

DE Die Pendelleuchte Simple Ceiling 2.0 steht für eine exquisite und wirkungsvolle Verbindung umweltbewusster Raumakustik mit ästhetischem Design. Die lineare Lichtquelle dieser Direkt- und Indirektleuchte ist zwischen zwölf U-förmigen ecoPET-Paneele aufgehängt, wodurch eine Luftschicht zwischen den Komponenten verbleibt, um die Schallabsorption zu unterstützen. Die Leuchte hat einen Rauschunterdrückungskoeffizienten der Stufe eins und verwendet einen Mikrostruktur-Diffusor, um Blendung zu eliminieren.

Create my unique code!

2139 - 00 - 2 - ▲ - ○ - ◆ - * - 2 - ◆

Example


Simple Ceiling 2.0
 ↑
 2139 - 00 - 2 - 8 - 4 - 01 - 40 - 2 - archi1201
 ↓
 one size DALI luminaire black 9005 pendant

standard power 4000K dark optics 80° with black reflector ARCHI felt color 1201

Quickinfo


luminaire size	1200x1230x150
light source size	1136x43
system power	↓19.6W*
luminous flux	↓2312lm*

Technical information




light distribution - down	120° opal 60° microprismatic 80° / 50° / 35° dark optics
luminous efficiency	117lm/W*
electrical control	ON/OFF ▲ 9 DALI ▲ 8
color temperature	3000K ● 3 4000K ● 4 on request: TUNABLE WHITE ● 9
luminaire color	black 9005 ● 01 white 9010 ● 02 on request: RAL color palette ● 99
optics	opal * 10 microprismatic * 11 dark opal * 13 dark optics 80° (black reflector) * 40 dark optics 80° (white reflector) * 41 dark optics 80° (silver reflector) * 42 dark optics 50° (black reflector) * 43 dark optics 50° (white reflector) * 44 dark optics 50° (silver reflector) * 45 dark optics 30° (black reflector) * 46 dark optics 30° (white reflector) * 47 dark optics 30° (silver reflector) * 48
fabric color	ARCHI felt color palette archixxx - choose color from page 202 ◆ archixxx

* Photometric data: dark optics 80°, white reflector, 4000K

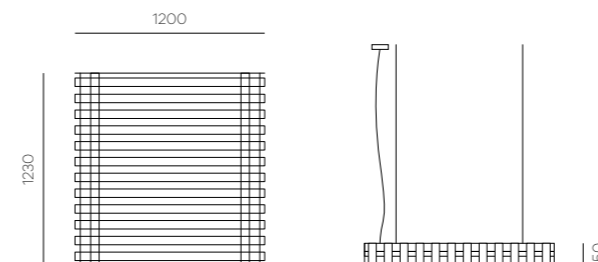


light distribution DOWN



ARCHI felt ecoPET 12 mm

EN The high-quality PET sound panels are robust, durable, and have a slightly textile surface that can be washed. They have excellent sound-absorbing properties, are flame-resistant and recyclable.

DE Hochwertige PET-Akustikplatten sind massiv, strapazierfähig, mit einer leicht textilen Oberfläche, die gewaschen werden kann. Sie haben hervorragende Schalldämmeigenschaften, sind schwer entflammbar und können recycelt werden.

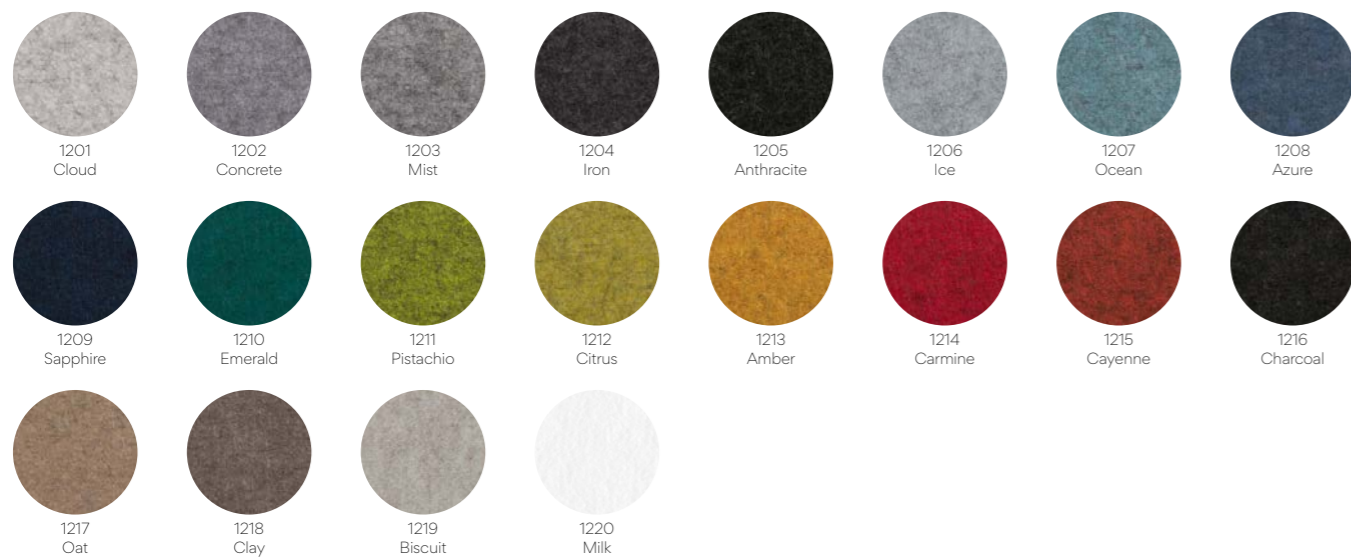

ARCHI felt ecoPET properties

Measurements

2800 mm × 1200 mm × 12 mm

gross size

Flammability Class

B-s1,d0

Acoustic values

Mounting method	Directly on the wall	50 mm cavity	50 mm cavity + 50 mm rockwool	100 mm cavity	100 mm cavity + 100 mm rockwool
NRC (100–5000 Hz)	0.40	0.75	0.95	0.80	1.00
aw (100–5000 Hz)	0.25	0.60	1.00	0.80	0.95
Acoustic Class	D	C	A	B	A