


MICARO-H



Luminaria creada con modelo de perfil: PDS-ZMG

MICARO-H-1

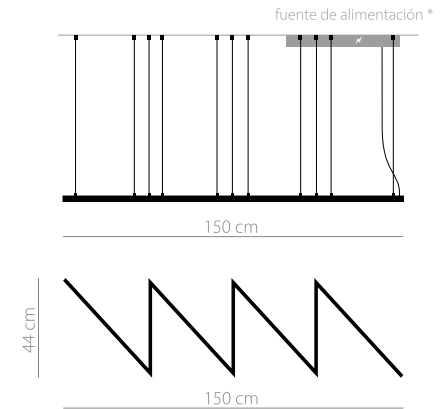

Color	Difusor	T° Color LED	Flujo luminoso	luminaira	Potencia	Eficiencia	Ref. n°
■	opal	3000 K	3047 lm		72 W	42 lm/W	FPMC001-0130EB
■		4000 K	3249 lm		72 W	45 lm/W	FPMC001-0140EB
■		3000 K	3047 lm		72 W	42 lm/W	FPMC001-0730EB
■		4000 K	3249 lm		72 W	45 lm/W	FPMC001-0740EB

MICARO-H-2

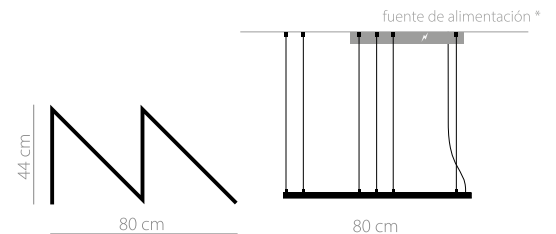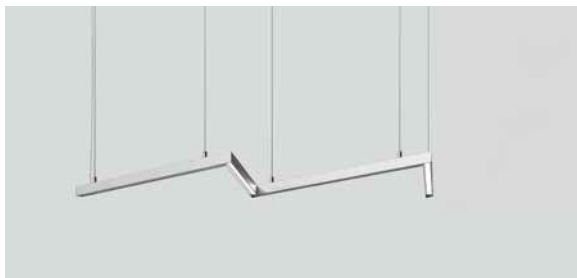

Color	Difusor	T° Color LED	Flujo luminoso	luminaira	Potencia	Eficiencia	Ref. n°
■	opal	3000 K	1401 lm		34 W	41 lm/W	FPMC002-0130EB
■		4000 K	1494 lm		34 W	44 lm/W	FPMC002-0140EB
■		3000 K	1401 lm		34 W	41 lm/W	FPMC002-0730EB
■		4000 K	1494 lm		34 W	44 lm/W	FPMC002-0740EB

Accesorios incluidos:

- Soportes de perfil: FI-8-LIN-ZM
- Soportes superficie/techo: RG-1
- Cable de suspensión
- Tira de LED: K-1440-24 (14,4 W/m)
- cable de alimentación
- control: ON / OFF
- tolerancia de parámetros +/- 10%
- accesorios de montaje pag.43
- * fuente de alimentación NO incluida



