

- The contrast of light and shadow creates a unique interior atmosphere
- Possibility of creating impressive lighting compositions through multiplication
- Flexible installation - wall or ceiling mounting with 360° fixture rotation
- Two size variants - larger light surface or subtle minimalism
- Quick installation in plasterboard

TECHNICAL SPECIFICATIONS


Material	aluminum
Mounting type	Surface mounted
Width [W]	90.4 mm
IP protection rating	20
Color Rendering Index CRI	90
MacAdam's ellipse	3 SDCM
Input voltage	24 V
Protection class	III
Building type	Commercial, Residential, HoReCa object, Retail, Entertainment/ Arts
Facility zone	conference room, lobby / foyer, wall lighting

Color	Cover	Length [L]	Luminous flux of the fixture	Luminare power	Color temperature	Ref
■ black anodized	black	209 mm	40 lm	1.8 W	3000 K	FNPO001-07300B
■ black anodized	black	209 mm	40 lm	1.8 W	4000 K	FNPO001-07400B
□ white lacquered	frosted	209 mm	40 lm	0.9 W	3000 K	FNPO001-10300B
□ white lacquered	frosted	209 mm	50 lm	0.9 W	4000 K	FNPO001-10400B
■ black anodized	black	309 mm	60 lm	2.7 W	3000 K	FNPO002-07300B
■ black anodized	black	309 mm	60 lm	2.7 W	4000 K	FNPO002-07400B
□ white lacquered	frosted	309 mm	60 lm	1.4 W	3000 K	FNPO002-10300B
□ white lacquered	frosted	309 mm	60 lm	1.4 W	4000 K	FNPO002-10400B
■ black anodized	black	609 mm	110 lm	5.5 W	3000 K	FNPO003-07300B
■ black anodized	black	609 mm	130 lm	5.5 W	4000 K	FNPO003-07400B
□ white lacquered	frosted	609 mm	110 lm	2.7 W	3000 K	FNPO003-10300B
□ white lacquered	frosted	609 mm	130 lm	2.7 W	4000 K	FNPO003-10400B
■ black anodized	black	909 mm	170 lm	8.2 W	3000 K	FNPO004-07300B
■ black anodized	black	909 mm	190 lm	8.2 W	4000 K	FNPO004-07400B
□ white lacquered	frosted	909 mm	180 lm	4 W	3000 K	FNPO004-10300B

Fixture STALALIGHT S

Color	Cover	Length [L]	Luminous flux of the fixture	Luminare power	Color temperature	Ref
<input type="checkbox"/> white lacquered	frosted	909 mm	200 lm	4 W	4000 K	FNPO004-10400B
<input checked="" type="checkbox"/> black anodized	black	1209 mm	220 lm	10.9 W	3000 K	FNPO005-07300B
<input checked="" type="checkbox"/> black anodized	black	1209 mm	260 lm	10.9 W	4000 K	FNPO005-07400B
<input type="checkbox"/> white lacquered	frosted	1209 mm	240 lm	5.4 W	3000 K	FNPO005-10300B
<input type="checkbox"/> white lacquered	frosted	1209 mm	260 lm	5.4 W	4000 K	FNPO005-10400B
<input checked="" type="checkbox"/> black anodized	black	1509 mm	280 lm	13.7 W	3000 K	FNPO006-07300B
<input checked="" type="checkbox"/> black anodized	black	1509 mm	320 lm	13.7 W	4000 K	FNPO006-07400B
<input type="checkbox"/> white lacquered	frosted	1509 mm	290 lm	6.8 W	3000 K	FNPO006-10300B
<input type="checkbox"/> white lacquered	frosted	1509 mm	320 lm	6.8 W	4000 K	FNPO006-10400B

SAMPLE PROJECTS

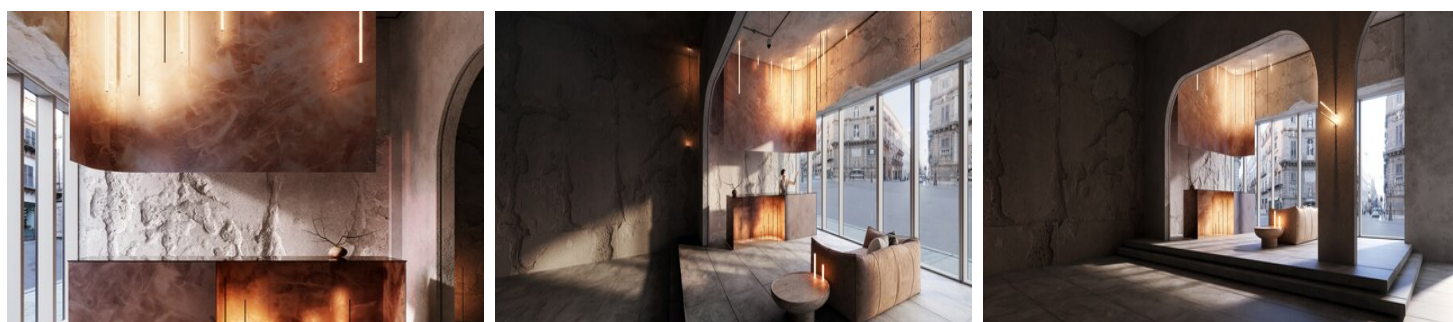

RELATED ACCESSORIES > ELECTRONICS > CONTROLLERS



RGB+CCT, Wlightbox
E60235



MONO\CCT\RGB\RGBW\RGBW+CCT, 5w1, SR5
E62159

RELATED ACCESSORIES > ELECTRONICS > CASAMBI CONTROL SYSTEM



Casambi CBU-ASD
E62147



Casambi CBU-PWM4
E62148

RELATED ACCESSORIES > ELECTRONICS > CONTROLLERS



MONO, Wlightbox
E60228

RELATED ACCESSORIES > ELECTRONICS > POWER SUPPLIES



KGP LV30W24CG 24V
E60503-030B-24



KGP LV30W24CG DALI 24V
E60504-030D-24



KGP LV60W24CG 24V
E60507-060B-24



KGP LV60W24CG DALI 24V
E60508-060D-24



KGP LV100W24CG 24V
E60511-100B-24



KGP LV100W24CG DALI 24V
E60512-100D-24



KGP LV150W24CG 24V
E60515-150B-24



KGP LV150W24CG DALI 24V
E60516-150D-24



KGP LV250W24CG 24V
E60519-250B-24



KGP LV250W24CG DALI 24V
E60520-250D-24



KGP CV25W24CG Triac 24V
E60502-025T-24



KGP CV50W24CG Triac 24V
E60510-050T-24




KGP CV100W24CG Triac 24V
E60514-100T-24



KGP FV12W24CG 24V
E60501-012B-24



SLIM HPFU 13W 24V
E60522-013B-24

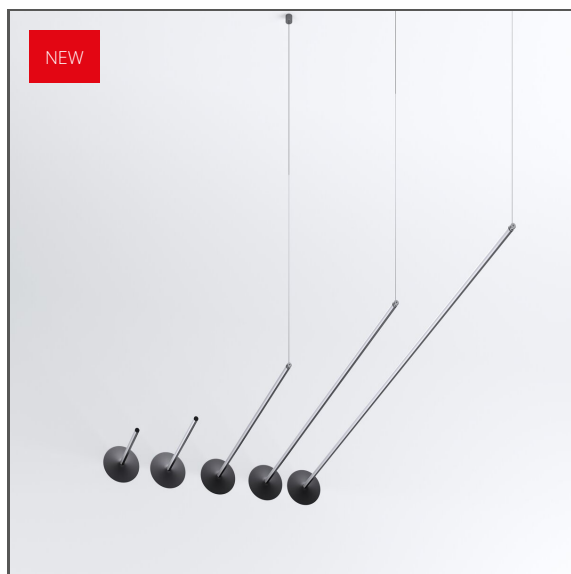

- The contrast of light and shadow creates a unique interior atmosphere
- Possibility of creating impressive lighting compositions through multiplication
- Flexible installation - wall or ceiling mounting with 360° fixture rotation
- Two size variants - larger light surface or subtle minimalism
- Quick installation in plasterboard

TECHNICAL SPECIFICATIONS


Material	aluminum
Mounting type	Surface mounted
Width [W]	90.4 mm
IP protection rating	20
Color Rendering Index CRI	90
MacAdam's ellipse	3 SDCM
Input voltage	24 V
Protection class	III
Building type	Commercial, Residential, HoReCa object, Retail, Entertainment/ Arts
Facility zone	conference room, lobby / foyer, wall lighting

Color	Cover	Length [L]	Luminous flux of the fixture	Luminare power	Color temperature	Ref
■ black anodized	black	209 mm	40 lm	1.8 W	3000 K	FNPO007-07300B
■ black anodized	black	209 mm	40 lm	1.8 W	4000 K	FNPO007-07400B
□ white lacquered	frosted	209 mm	40 lm	0.9 W	3000 K	FNPO007-10300B
□ white lacquered	frosted	209 mm	50 lm	0.9 W	4000 K	FNPO007-10400B
■ black anodized	black	309 mm	60 lm	2.7 W	3000 K	FNPO008-07300B
■ black anodized	black	309 mm	60 lm	2.7 W	4000 K	FNPO008-07400B
□ white lacquered	frosted	309 mm	60 lm	1.4 W	3000 K	FNPO008-10300B
□ white lacquered	frosted	309 mm	60 lm	1.4 W	4000 K	FNPO008-10400B
■ black anodized	black	616 mm	110 lm	5.5 W	3000 K	FNPO009-07300B
■ black anodized	black	616 mm	130 lm	5.5 W	4000 K	FNPO009-07400B
□ white lacquered	frosted	616 mm	110 lm	2.7 W	3000 K	FNPO009-10300B
□ white lacquered	frosted	616 mm	130 lm	2.7 W	4000 K	FNPO009-10400B
■ black anodized	black	916 mm	170 lm	8.2 W	3000 K	FNPO010-07300B
■ black anodized	black	916 mm	190 lm	8.2 W	4000 K	FNPO010-07400B
□ white lacquered	frosted	916 mm	180 lm	4 W	3000 K	FNPO010-10300B

Fixture STALALIGHT S-WALL

Color	Cover	Length [L]	Luminous flux of the fixture	Luminare power	Color temperature	Ref
<input type="checkbox"/> white lacquered	frosted	916 mm	200 lm	4 W	4000 K	FNPO010-10400B
<input checked="" type="checkbox"/> black anodized	black	1216 mm	220 lm	10.9 W	3000 K	FNPO011-07300B
<input checked="" type="checkbox"/> black anodized	black	1216 mm	260 lm	10.9 W	4000 K	FNPO011-07400B
<input type="checkbox"/> white lacquered	frosted	1216 mm	240 lm	5.4 W	3000 K	FNPO011-10300B
<input type="checkbox"/> white lacquered	frosted	1216 mm	260 lm	5.4 W	4000 K	FNPO011-10400B

SAMPLE PROJECTS

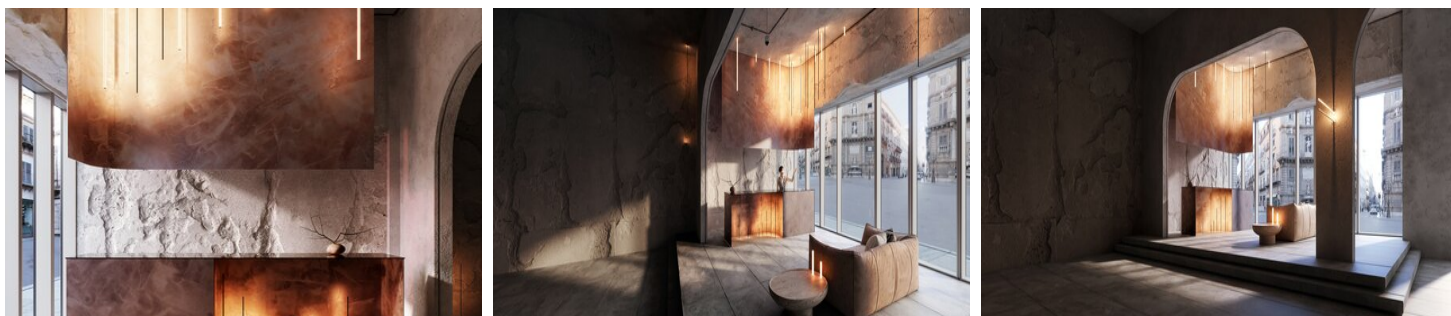

RELATED ACCESSORIES > ELECTRONICS > CONTROLLERS



RGB+CCT, Wlightbox
E60235



MONO\CCT\RGB\RGBW\RGBW+CCT, 5w1, SR5
E62159

RELATED ACCESSORIES > ELECTRONICS > CASAMBI CONTROL SYSTEM



Casambi CBU-ASD
E62147



Casambi CBU-PWM4
E62148

RELATED ACCESSORIES > ELECTRONICS > CONTROLLERS



MONO, Wlightbox
E60228

RELATED ACCESSORIES > ELECTRONICS > POWER SUPPLIES



KGP LV30W24CG 24V
E60503-030B-24



KGP LV30W24CG DALI 24V
E60504-030D-24



KGP LV60W24CG 24V
E60507-060B-24



KGP LV60W24CG DALI 24V
E60508-060D-24



KGP LV100W24CG 24V
E60511-100B-24



KGP LV100W24CG DALI 24V
E60512-100D-24



KGP LV150W24CG 24V
E60515-150B-24



KGP LV150W24CG DALI 24V
E60516-150D-24



KGP LV250W24CG 24V
E60519-250B-24



KGP LV250W24CG DALI 24V
E60520-250D-24



KGP CV25W24CG Triac 24V
E60502-025T-24



KGP CV50W24CG Triac 24V
E60510-050T-24



KGP CV100W24CG Triac 24V
E60514-100T-24



KGP FV12W24CG 24V
E60501-012B-24



SLIM HPFU 13W 24V
E60522-013B-24



- The contrast of light and shadow creates a unique interior atmosphere
- Possibility of creating impressive lighting compositions through multiplication
- Flexible installation – wall or ceiling mounting with 360° fixture rotation
- Two size variants – larger light surface or subtle minimalism
- Quick installation in plasterboard

TECHNICAL SPECIFICATIONS

Material	aluminum				
Cover	satin				
Mounting type	Surface mounted				
Width [W]	90.4 mm				
IP protection rating	20				
Color Rendering Index CRI	90				
MacAdam's ellipse	3 SDCM				
Input voltage	24 V				
Protection class	III				
Building type	Commercial, Residential, HoReCa object, Retail, Entertainment/ Arts				
Facility zone	conference room, lobby / foyer, wall lighting				
Color	Length [L]	Luminous flux of the fixture	Luminare power	Color temperature	Ref
■ black anodized	608 mm	830 lm	11.5 W	3000 K	FNJD003-07300B
■ black anodized	608 mm	880 lm	11.5 W	4000 K	FNJD003-07400B
□ white lacquered	608 mm	830 lm	11.5 W	3000 K	FNJD003-10300B
□ white lacquered	608 mm	880 lm	11.5 W	4000 K	FNJD003-10400B
■ black anodized	908 mm	1250 lm	17.3 W	3000 K	FNJD004-07300B
■ black anodized	908 mm	1320 lm	17.3 W	4000 K	FNJD004-07400B
□ white lacquered	908 mm	1250 lm	17.3 W	3000 K	FNJD004-10300B
□ white lacquered	908 mm	1320 lm	17.3 W	4000 K	FNJD004-10400B
■ black anodized	1208 mm	1660 lm	23 W	3000 K	FNJD005-07300B
■ black anodized	1208 mm	1770 lm	23 W	4000 K	FNJD005-07400B
□ white lacquered	1208 mm	1660 lm	23 W	3000 K	FNJD005-10300B
□ white lacquered	1208 mm	1770 lm	23 W	4000 K	FNJD005-10400B
■ black anodized	1508 mm	2080 lm	28.8 W	3000 K	FNJD006-07300B
■ black anodized	1508 mm	2210 lm	28.8 W	4000 K	FNJD006-07400B

Fixture STALALIGHT M

Color	Length [L]	Luminous flux of the fixture	Luminare power	Color temperature	Ref
<input type="checkbox"/> white lacquered	1508 mm	2080 lm	28.8 W	3000 K	FNJD006-10300B
<input type="checkbox"/> white lacquered	1508 mm	2210 lm	28.8 W	4000 K	FNJD006-10400B
<input checked="" type="checkbox"/> black anodized	208 mm	280 lm	3.8 W	3000 K	FNJD007-07300B
<input checked="" type="checkbox"/> black anodized	208 mm	300 lm	3.8 W	4000 K	FNJD007-07400B
<input type="checkbox"/> white lacquered	208 mm	280 lm	3.8 W	3000 K	FNJD007-10300B
<input type="checkbox"/> white lacquered	208 mm	300 lm	3.8 W	4000 K	FNJD007-10400B
<input checked="" type="checkbox"/> black anodized	308 mm	680 lm	5.8 W	3000 K	FNJD008-07300B
<input checked="" type="checkbox"/> black anodized	308 mm	720 lm	5.8 W	4000 K	FNJD008-07400B
<input type="checkbox"/> white lacquered	308 mm	680 lm	5.8 W	3000 K	FNJD008-10300B
<input type="checkbox"/> white lacquered	308 mm	720 lm	5.8 W	4000 K	FNJD008-10400B

SAMPLE PROJECTS



RELATED ACCESSORIES > ELECTRONICS > CONTROLLERS




RGB+CCT, Wlightbox
E60235



MONO\CCT\RGB\RGBW\RGBW+CCT, 5w1, SR5
E62159

RELATED ACCESSORIES > ELECTRONICS > CASAMBI CONTROL SYSTEM



Casambi CBU-ASD
E62147



Casambi CBU-PWM4
E62148

RELATED ACCESSORIES > ELECTRONICS > CONTROLLERS



MONO, Wlightbox
E60228

RELATED ACCESSORIES > ELECTRONICS > POWER SUPPLIES



KGP LV30W24CG 24V
E60503-030B-24



KGP LV30W24CG DALI 24V
E60504-030D-24



KGP LV60W24CG 24V
E60507-060B-24



KGP LV60W24CG DALI 24V
E60508-060D-24



KGP LV100W24CG 24V
E60511-100B-24



KGP LV100W24CG DALI 24V
E60512-100D-24



KGP LV150W24CG 24V
E60515-150B-24



KGP LV150W24CG DALI 24V
E60516-150D-24



KGP LV250W24CG 24V
E60519-250B-24



KGP LV250W24CG DALI 24V
E60520-250D-24



**KGP CV25W24CG Triac
24V**
E60502-025T-24



**KGP CV50W24CG Triac
24V**
E60510-050T-24



**KGP CV100W24CG Triac
24V**
E60514-100T-24



KGP FV12W24CG 24V
E60501-012B-24



SLIM HPFU 13W 24V
E60522-013B-24



- The contrast of light and shadow creates a unique interior atmosphere
- Possibility of creating impressive lighting compositions through multiplication
- Flexible installation – wall or ceiling mounting with 360° fixture rotation
- Two size variants – larger light surface or subtle minimalism
- Quick installation in plasterboard


TECHNICAL SPECIFICATIONS

Material	aluminum				
Cover	satin				
Mounting type	Surface mounted				
Width [W]	90.4 mm				
IP protection rating	20				
Color Rendering Index CRI	90				
MacAdam's ellipse	3 SDCM				
Input voltage	24 V				
Protection class	III				
Building type	Commercial, Residential, HoReCa object, Retail, Entertainment/ Arts				
Facility zone	conference room, lobby / foyer, wall lighting				
Color	Length [L]	Luminous flux of the fixture	Luminare power	Color temperature	Ref
■ black anodized	619 mm	830 lm	11.5 W	3000 K	FNJD009-07300B
■ black anodized	619 mm	880 lm	11.5 W	4000 K	FNJD009-07400B
□ white lacquered	619 mm	830 lm	11.5 W	3000 K	FNJD009-10300B
□ white lacquered	619 mm	880 lm	11.5 W	4000 K	FNJD009-10400B
■ black anodized	919 mm	1250 lm	17.3 W	3000 K	FNJD010-07300B
■ black anodized	919 mm	1320 lm	17.3 W	4000 K	FNJD010-07400B
□ white lacquered	919 mm	1250 lm	17.3 W	3000 K	FNJD010-10300B
□ white lacquered	919 mm	1320 lm	17.3 W	4000 K	FNJD010-10400B
■ black anodized	1219 mm	1660 lm	23 W	3000 K	FNJD011-07300B
■ black anodized	1219 mm	1770 lm	23 W	4000 K	FNJD011-07400B
□ white lacquered	1219 mm	1660 lm	23 W	3000 K	FNJD011-10300B
□ white lacquered	1219 mm	1770 lm	23 W	4000 K	FNJD011-10400B
■ black anodized	208 mm	280 lm	3.8 W	3000 K	FNJD012-07300B
■ black anodized	208 mm	300 lm	3.8 W	4000 K	FNJD012-07400B

Fixture STALALIGHT M-WALL

Color	Length [L]	Luminous flux of the fixture	Luminare power	Color temperature	Ref
<input type="checkbox"/> white lacquered	208 mm	280 lm	3.8 W	3000 K	FNJD012-10300B
<input type="checkbox"/> white lacquered	208 mm	300 lm	3.8 W	4000 K	FNJD012-10400B
<input checked="" type="checkbox"/> black anodized	308 mm	680 lm	5.8 W	3000 K	FNJD013-07300B
<input checked="" type="checkbox"/> black anodized	308 mm	720 lm	5.8 W	4000 K	FNJD013-07400B
<input type="checkbox"/> white lacquered	308 mm	680 lm	5.8 W	3000 K	FNJD013-10300B
<input type="checkbox"/> white lacquered	308 mm	720 lm	5.8 W	4000 K	FNJD013-10400B


SAMPLE PROJECTS

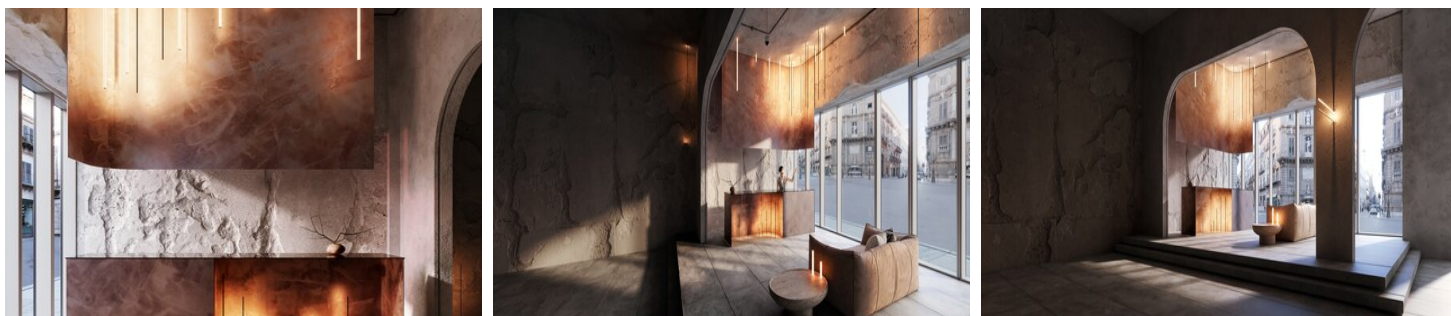

RELATED ACCESSORIES > ELECTRONICS > CONTROLLERS



RGB+CCT, Wlightbox
E60235

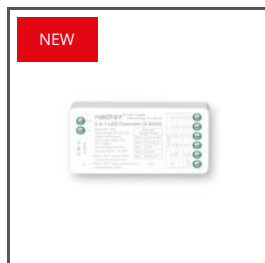

MONO\CCT\RGB\RGBW\RGBW+CCT, 5w1, SR5
E62159

RELATED ACCESSORIES > ELECTRONICS > CASAMBI CONTROL SYSTEM



Casambi CBU-ASD
E62147



Casambi CBU-PWM4
E62148

RELATED ACCESSORIES > ELECTRONICS > CONTROLLERS



MONO, Wlightbox
E60228

RELATED ACCESSORIES > ELECTRONICS > POWER SUPPLIES



KGP LV30W24CG 24V
E60503-030B-24



KGP LV30W24CG DALI 24V
E60504-030D-24



KGP LV60W24CG 24V
E60507-060B-24



KGP LV60W24CG DALI 24V
E60508-060D-24



KGP LV100W24CG 24V
E60511-100B-24



KGP LV100W24CG DALI 24V
E60512-100D-24



KGP LV150W24CG 24V
E60515-150B-24



KGP LV150W24CG DALI 24V
E60516-150D-24



KGP LV250W24CG 24V
E60519-250B-24



KGP LV250W24CG DALI 24V
E60520-250D-24



KGP CV25W24CG Triac 24V
E60502-025T-24



KGP CV50W24CG Triac 24V
E60510-050T-24



KGP CV100W24CG Triac 24V
E60514-100T-24



KGP FV12W24CG 24V
E60501-012B-24



SLIM HPFU 13W 24V
E60522-013B-24