

# Piramid Ceiling

**EN** Piramid Ceiling is a multifunctional suspended ceiling system that provides top-quality direct lighting and effective sound damping, which is sought-after in the office sector. It is distinguished by a pyramidal arrangement of acoustic baffles arranged alternately lengthwise and crosswise design. The unit acoustic baffles complement the linear luminaires and add a sound-dampening cover to large ceiling expanses. These stunning sound management solutions use two 4-foot Line 43 linear luminaires. The modern, eco-friendly linear housings are available in fourteen high-quality optics and three color temperatures.

**DE** Piramid Ceiling ist ein multifunktionales abgehängtes Deckensystem, das eine erstklassige direkte Beleuchtung und effektive Schalldämmung bietet, die im Bürobereich gefragt ist. Es zeichnet sich durch eine pyramidenförmige Anordnung von Schallwänden aus, die abwechselnd längs und quer angeordnet sind. Die unbeleuchteten Akustikbaffeln ergänzen die Langfeldleuchten und fügen großen Deckenflächen eine schalldämpfende Hülle hinzu. Diese atemberaubenden Soundmanagement-Lösungen verwenden zwei 4-Fuß-Line 43-Linearleuchten. Die modernen, umweltfreundlichen Lineargehäuse gibt es in vierzehn hochwertigen Optiken und drei Farbtemperaturen.

### Create my unique code!

2140 - 00 - 2 - ▲ - ○ - ◆ - \* - 2 - ◆


### Example

Piramid Ceiling	standard power	4000K	dark optics 80° with black reflector	ARCHI felt color 1201
↑	↑	↑	↑	↑
2140 - 00 - 2 - 8 - 4 - 01 - 40 - 2 - archi1201				
↓	↓	↓	↓	↓
one size	DALI	luminaire black 9005	pendant	

### Quickinfo



luminaire size	1200x1600x210
light source size	2 x 1136x43
system power	2 x ↓19.6W*
luminous flux	2 x ↓2312lm*

### Technical information



light distribution - down	120° opal	
	60° microprismatic	
	80° / 50° / 35° dark optics	
	asymmetric - wall washer	
luminous efficiency	117lm/W*	
electrical control	ON / OFF	▲ 9
	DALI	▲ 8
color temperature	3000K	● 3
	4000K	● 4
	on request: TUNABLE WHITE	● 9
luminaire color	black 9005	◆ 01
	white 9010	◆ 02
	on request: RAL color palette	◆ 99
optics	opal	* 10
	microprismatic	* 11
	dark opal	* 13
	dark optics 80° (black reflector)	* 40
	dark optics 80° (white reflector)	* 41
	dark optics 80° (silver reflector)	* 42
	dark optics 50° (black reflector)	* 43
	dark optics 50° (white reflector)	* 44
	dark optics 50° (silver reflector)	* 45
	dark optics 30° (black reflector)	* 46
	dark optics 30° (white reflector)	* 47
	dark optics 30° (silver reflector)	* 48
fabric color	ARCHI felt color palette archixxx - choose color from page 202	◆ archixxx


\* Photometric data: dark optics 80°, white reflector, 4000K

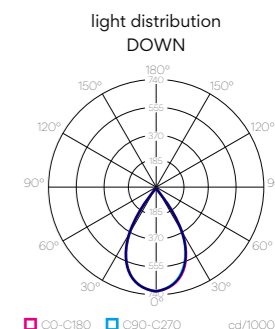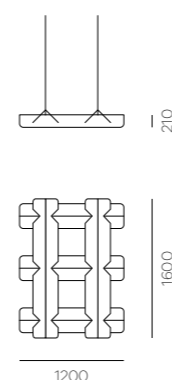

# ARCHI felt ecoPET 12 mm

**EN** The high-quality PET sound panels are robust, durable, and have a slightly textile surface that can be washed. They have excellent sound-absorbing properties, are flame-resistant and recyclable.

**DE** Hochwertige PET-Akustikplatten sind massiv, strapazierfähig, mit einer leicht textilen Oberfläche, die gewaschen werden kann. Sie haben hervorragende Schalldämmeigenschaften, sind schwer entflammbar und können recycelt werden.

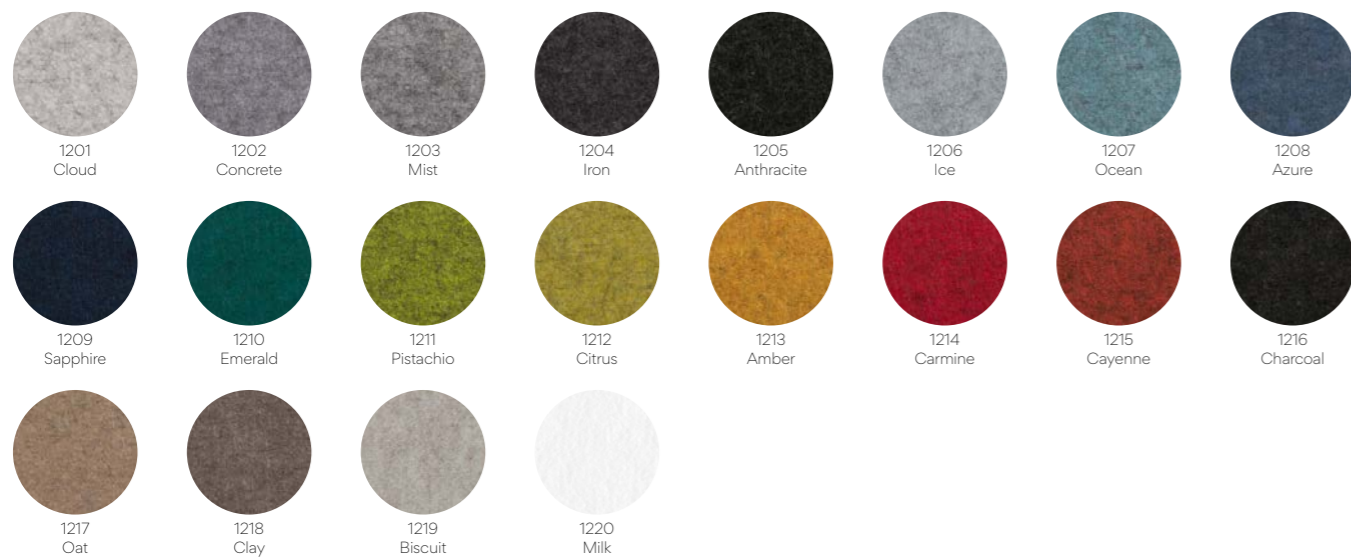

# ARCHI felt ecoPET properties

## Measurements

2800 mm × 1200 mm × 12 mm

gross size

## Flammability Class

B-s1,d0

## Acoustic values

Mounting method	Directly on the wall	50 mm cavity	50 mm cavity + 50 mm rockwool	100 mm cavity	100 mm cavity + 100 mm rockwool
NRC (100–5000 Hz)	0.40	0.75	0.95	0.80	1.00
aw (100–5000 Hz)	0.25	0.60	1.00	0.80	0.95
Acoustic Class	D	C	A	B	A